



A.u.S. SPIELGERÄTE GMBH
SCHEYDGASSE 48, AT 1210 WIEN
+43 (0) 1 271 66 00 65 FAX +43 (0) 1 271 66 00 75
www.aus.at ✉ verkauf@aus.at

Hopper

Evolution

High dispensing speed and reliability come together in a new generation of hoppers

Based on a belt drive, Evolution is the result of an entirely new design, which represents a decisive improvement, in terms of both performance and ease of maintenance. The combination of extremely wear-resistant plastic resins with state of the art electronics has produced a device with low purchase and management costs.


This type of hopper can be used for 95% of coins and tokens worldwide, without needing adjustments. Evolution is completely interchangeable with the other models available on the market. Suitable for many applications: Vending, Parking, Retail, Amusement.



Features

- Board easily accessible from outside and extractible for facilitating maintenance
- DC motor, driven by an electronic actuator, which reduces friction and noise
- Equipped with a built-in agitator to prevent coin jams, as well as with additional electronic anti-jam electronics
- The standard version can be easily transformed into the adjoining version by simply removing the cover, which is fastened by two screws, and moving the connector to the new position
- Interfaces: standard, parallel or ccTalk serial. The latter guarantees excellent security and diagnostics management
- High quality materials for long trouble free operations

Technical Schematics

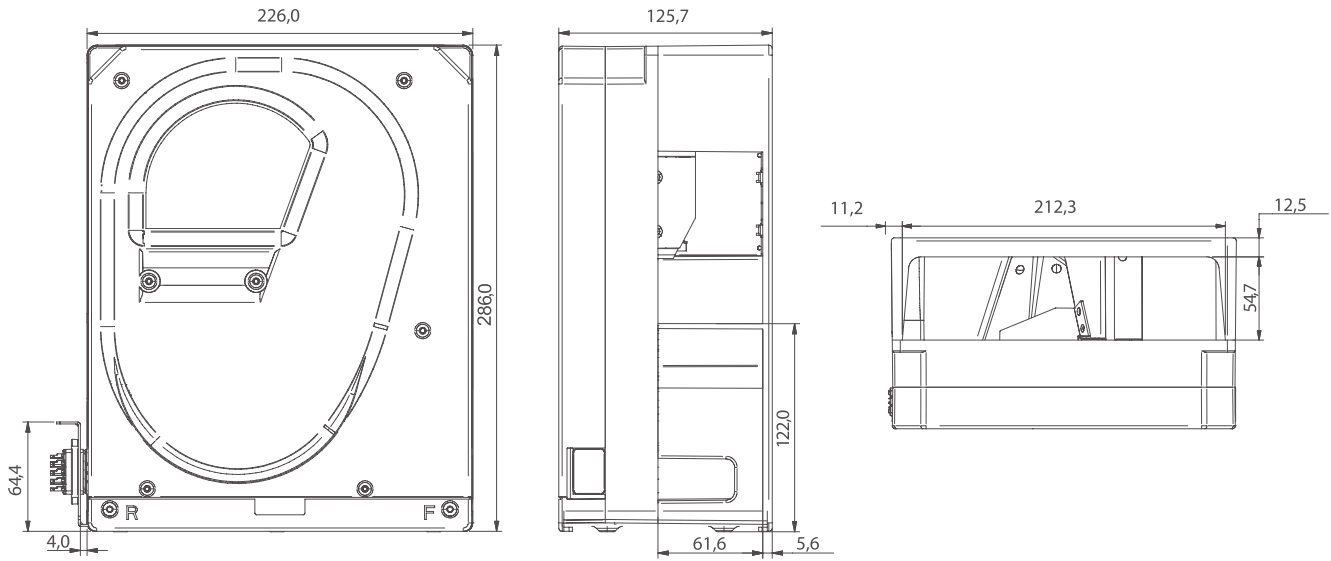

Unit of measure: mm

Functions

- DC motor.
- Double installation option: adjoining and standard.
- Minimal maintenance.
- Reduced noise.
- Anti-jam electronics.



Transformation from standard to adjoining version



Board easily extractible from the outside

Technical Specifications

Dimensions (L x H x W)	126 x 286 x 226 mm
Weight	2,5 Kg
Power supply	20 ÷ 24 Vdc ± 10 %
Current consumption	40 mA in stand-by – 2.5A during dispensing
Power consumption	0.8 W in stand-by - 50 W during dispensing
Operating temperature	0 °C ÷ 60 °C – relative humidity 5 ÷ 95%
Coins accepted	Ø 16 ÷ 30 mm – thickness 1.25 - 3.5 mm
Payout speed	4 - 5 coins per second

Coin Capacity

	1.00 €
Capacity	1,500



A.u.S. SPIELGERÄTE GMBH
 SCHEYDGASSE 48, AT 1210 WIEN
 ☎ +43 (0) 1 271 66 00 65 FAX +43 (0) 1 271 66 00 75
 🌐 www.aus.at ✉ verkauf@aus.at